



Dual channel transmitter with 2 analog signal outputs for the continuous measurement of differential pressure for installation in electrical cabinets on mounting rails.

Can be ordered as a variant with 1 or 2 dP sensors.

Bidirectional differential pressure sensors based on dynamic (massflow) measurement with absolute pressure sensor included.

Configuration with USB cable for Windows PC.

Configuration possible without external power supply.

Art.-Nr.:

XXXXXXX
XXXXXXX

Product-name:

nLink+ EC AS B 1*dp sensor ± 250 Pa
nLink+ EC AS BB 2*dp sensor ± 250 Pa

Technical data:

Measurement Range	-250 to +250 Pascal		
Accuracy at 20°C	Range ± 50 Pa: ± 0.20 Pa	Range ± 100 Pa: ± 0.25 Pa	Range ± 250 Pa: ± 0.50 Pa
Temperature effect	Max. ± 0.10 Pa		
Max. Resolution	0.1 Pa		
Long term stability	$\pm 0.05\%$ FSS (typ)		
Flow rate	<200ul/min		
Ambient pressure dependency	Compensated with built in abs pressure sensor		
Ambient pressure: Range	700 – 1260 hPa / mBar		
Ambient pressure: Accuracy	± 0.5 hPa		
Max. permissible overpressure	2 bar (burst pressure 4 bar)		
Power supply	24V DC, Permissible voltage range: 5 to 39V		
Power consumption	<0.5W		
Display	none		
Status LED	LED for power On, LED for nSens connected		
Output	2 configurable relays outputs Relay performance: Max. power consumption 60W Max. voltage 50V Max. current 5A		
Housing material	PA6.6 (UL94V0), mounting rail holder		
Protection class	none, installation in protected cabinet required		
Soldering material	lead free (RoHS compliant)		
Working temperature	0 to 50°C		
Storage temperature	-10 to 60°C (non-condensing)		
CE-/EMC	Safety: EN 61010-1:2020 EMC: IEC 61000-6-3:2020, EN 61000-6-3:2007+A1:2011 EN IEC 6100-6-3:2021 IEC 61000-6-2:2016, EN 61000-6-2:2019 IEC 61326-1:2012 / EN 61326-1:2013 IEC 61326-1:2020 / EN 61326-1:2021		

Electrical installation:


Clamping range	0.13 - 1.5mm ² (Push-in Spring clip)	
Wires	w. plastic collar ferrule DIN 46228/4:	0,25 - 0.75 mm ²
	w. wire end ferrule DIN 46228/1:	0,25 - 1.50 mm ²
	Solid, min. H05(07) V-U	0.2 - 1.50 mm ²
	Wire connection cross section AWG28 - 14	

Cable specifications depend on the installation and have to be defined by the designer or installer. Heavy machinery and other instrumentation should not share the same power supply wiring. Use noise filters and surge protectors if required.

For EMC protection it is recommended to take the following measures:

- Wires emitting interference must be separated from measurement and analysis units
- Parallel guidance of measurement cables and electrical power cables must be avoided, use different channels with separation (see European Standard EN50170 for detailed information)

Dimension & Schematics:

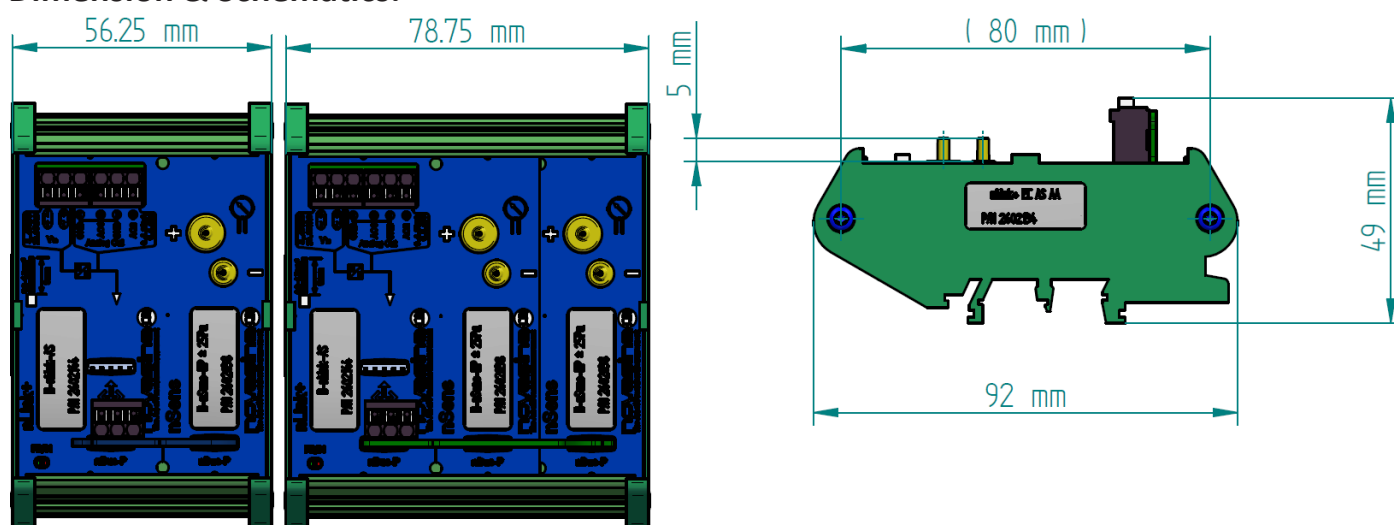

More information & accessoires

[Link to Website>](#)



Technical data subject to change without prior notice